ELECTRIC PUMP

EL12.5

DRAGFLOW ULTIMATE EFFICIENCY



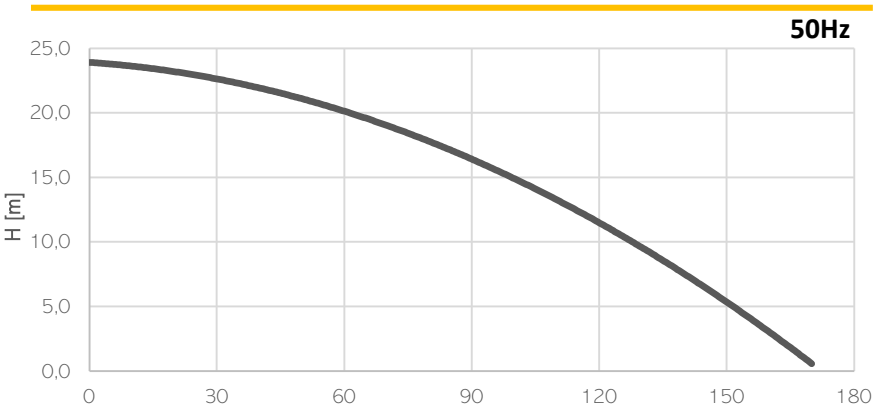

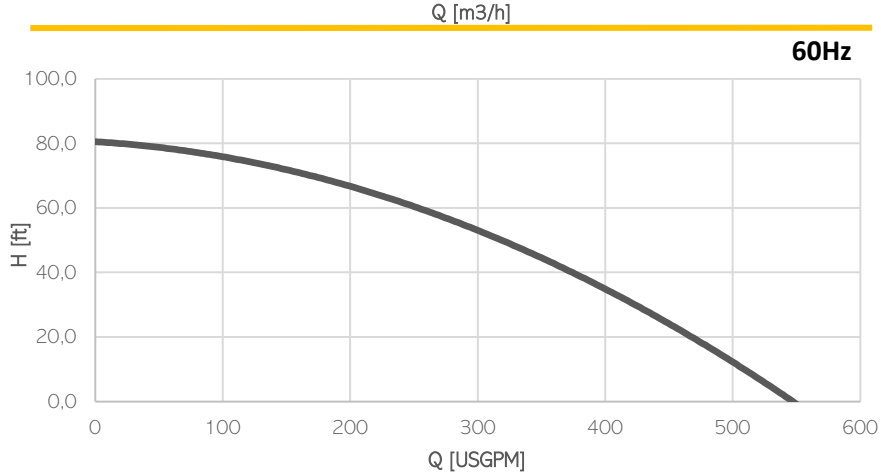

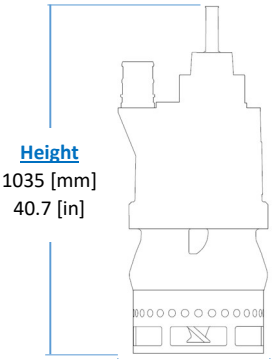

Height
1035 [mm]
40.7 [in]

Max diameter
450 [mm]
17.7 [in]

Weight
(without cable)
290 [kg]
640 [lb]

Model	EL12.5	
Brake Power [kW|HP]	9| 12	
Electric Power [kW|HP]	10.4| 14	
Frequency [Hz]	50	60
Efficiency [%]	32	32
Number of Poles	4	4
RPM	1450	1740
Voltage [V]	400	460
Rated Current [A]	18.8	16.2
Solid handling [mm|in]	25 | 1	
Discharge (Hose adaptor) [mm|in]	100 | 4''	

Electrical motor

Insulation class H

Cable

1 x H07RN-F 4G10 length 20m

Operating Conditions

Max liquid temperature 35°C
Min Submersion depth 380mm

Materials

Part	Standard
Casing	Cast Iron EN-GJS500
Body	Cast Iron EN-GJS500
Wear Parts Minimum hardness [HB]	High chrome EN-GJN-HV600 (CH6) 550
Main shaft	High tensile 39NiCrMo3
PH Range	5-10

Seals and lubricants

Version	STANDARD
Motor Side	MECHANICAL
Impeller Side	MECHANICAL
Oil type	ISO32